

Top Sellers

Construction Compliance & Stormwater Management



Hundreds of Other Construction Compliance and Stormwater Management Products. Visit www.constructioncompliance.com to see more.

Ultra-Drain Guard® BMP SWPPP LEED



Keep sediment and other pollutants from entering the water system with Ultra-Drain Guard catch basin inserts

- + This simple, yet specifically designed and engineered geotextile fabric catch basin insert can be installed in most drains. The heavy-duty material removes contaminants like litter, sand, and oil from stormwater flow.
- + Installation is quick and easy - Simply raise the grate, place the Ultra-Drain Guard over the opening and carefully lower the grate back into place, pinching the fabric in place to keep the unit secure.
- + Removes hydrocarbons, dirt, sand and other contaminants.
- + Exceeds 80% sediment removal efficiency.
- + Designed for practical use in industrial facilities, construction sites, parking lots, and "drive-up" retail facilities.
- + Helps comply with NPDES, 40 CFR 122.26 (1999) and TMDL requirements.



Ultra-Drain Guards® Oil & Sediment Plus

Ultra-Drain Guards® Oil & Sediment Model

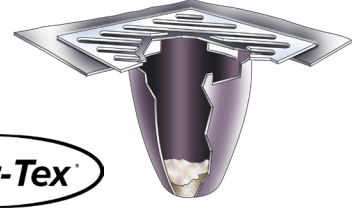

Patents: See www.ultratechpatents.com

Part#	Description	Dimensions in. (mm)	Performance	Weight each lbs. (kg)
9217	Oil & Sediment (1-Pack)	48 x 36 x 18 (1,220 x 915 x 458)	Up to .87 gals. (3.5 L) of oil and up to 40 lbs. (18 kg) of sediment	1.0 (0.5)
9218	Oil & Sediment (10-Pack)	48 x 36 x 18 (1,220 x 915 x 458)	Up to .87 gals. (3.5 L) of oil and up to 40 lbs. (18 kg) of sediment	1.0 (0.5)
9356	Oil & Sediment Large (1-Pack)	60 x 60 x 18 (1,524 x 1,524 x 458)	Up to 1.55 gals. (6 L) of oil and up to 40 lbs. (18 kg) of sediment	2.0 (1.0)
9219	Oil & Sediment Plus (1-Pack)	48 x 36 x 18 (1,220 x 915 x 458)	Up to 1.38 gals. (5 L) of oil and up to 40 lbs. (18 kg) of sediment	2.0 (1.0)
9220	Oil & Sediment Plus (10-Pack)	48 x 36 x 18 (1,220 x 915 x 458)	Up to 1.38 gals. (5 L) of oil and up to 40 lbs. (18 kg) of sediment	2.0 (1.0)
9358	Oil & Sediment Plus Large (1-Pack)	60 x 60 x 18 (1,524 x 1,524 x 458)	Up to 2.06 gals. (8 L) of oil and up to 40 lbs. (18 kg) of sediment	3.0 (1.5)
9227	Trash & Debris (1-Pack)	48 x 36 x 18 (1,220 x 915 x 458)	1 cu. ft. (28 L) before reaching bypass ports	1.0 (0.5)
9235	Grate Hook	26 L x 5 W (handle) x .75 thick	-	4.0 (2.0)



www.georgiaunderground.net



Ultra-Drain Guard® Economy Frame Model MADE IN USA

A catch basin insert that adjusts to the size of the storm drain

- + Metal frame quickly adjusts to fit most drains - keeps the Ultra-Drain Guard in place, even when grating is removed.
- + Removes up to 0.5 gallons of hydrocarbons as well as dirt, sand, and other contaminants.
- + Adjustable catch basin insert quickly re-sizes to fit almost any storm drain – no trimming of excess fabric required.
- + Quick and clean installation – no measuring or trimming required.
- + Helps comply with NPDES, 40 CFR 122.26 (1999) and TMDL requirements.



Square/Rectangle Model					
Part#	Qty.	Dims/Unit Min. in (mm)	Dims/Unit Max. in (mm)	Performance/Unit	Weight/Unit lbs. (kg)
8936	10	16 x 20 x 18 (406 x 508 x 457)	28 x 36 x 18 (711 x 914 x 457)	Up to 0.5 gal (1.9 L) of oil and up to 40 lbs. (18 kg) of sediment	3.0 (1.4)

Round Model					
Part#	Qty.	Dims/Unit Min. in (mm)	Dims/Unit Max. in (mm)	Performance/Unit	Weight/Unit lbs. (kg)
8920	1	22 x 22 x 14 (559 x 559 x 356)	25 x 25 x 14 (635 x 635 x 356)	Up to 0.5 gal (1.9 L) of oil and up to 40 lbs. (18 kg) of sediment	1 (0.5)
8921	1	25 x 25 x 14 (635 x 635 x 356)	29 x 29 x 14 (737 x 737 x 356)	Up to 0.5 gal (1.9 L) of oil and up to 40 lbs. (18 kg) of sediment	2 (0.9)

Ultra-Curb Guard Plus®

Protect curb inlets from oil and sediment-laden stormwater runoff

- + Quick and easy installation.
- + Modular design — build to any length.
- + Units can be quickly and easily connected to form longer lengths.
- + Wedge-shaped, heavy-duty foam secures unit in curb inlet.
- + Woven, polypropylene material provides high flow rate — will not cause ponding or flooding.
- + Helps comply with NPDES, 40 CFR 122.26 (1999) and TMDL requirements.



Part#	Dimensions in. (mm)	Containment Cap. gal. (L)	Weight lbs. (kg)
9248	4 dia. x 36 L (102 x 915)	1 (3.79)	6.0 (3.0)
9251	4 dia. x 48 L (102 x 1,220)	1.4 (5.3)	8.0 (3.5)

Ultra-Flood Stopper® MADE IN USA NEW PRODUCT

Sandless sandbags protect property against floods, leaks, and other liquid emergencies

- + Easy-to-use and transport - bags and tubes weigh approximately one pound each before being activated with fresh water
- + Sturdy construction – Passes 3+ drop tests from 1 meter
- + Quick acting - In minutes, the bag fills to capacity, ready to prevent floods and leakage from causing damage



Part#	Description	Dimensions - Dry in. (mm)	Weight - Dry lbs. (kg)	Weight - Activated lbs. (kg)
5340	6-Pack	12 x 24 x .5 (305 x 610 x 13)	140 (529.96)	Approx. 30 lbs. (13.6)

Ultra-Drain Guard® Heavy Metal Model MADE IN USA

Remove heavy metal runoff water at the storm drain

- + Specialized catch basin insert has “quilted” sections sewn into the body of the unit where stormwater flows through.
- + An impermeable PVC skirt at the top of the unit funnels all water to the lower portion of the Ultra-Drain Guard where it is forced to move through the media before it can move on into the storm drain.
- + Helps comply with NPDES, 40 CFR 122.26 (1999) when used as Best Management Practice in Storm Water Pollution Prevention Plans.



Patents: See www.ultratechpatents.com

Part#	Dimensions in (mm)	Flow Rate GPM (LPM)	Sediment Cap. lbs. (kg)	Oil Cap. lbs. (kg)	Metal Cap. grams	Weight lbs. (kg)
9397	48 x 36 x 18 (1,219 x 914 x 457)	275 (1,040)	30 (13.5)	0.23 (0.87)	190	8.0 (3.5)

Ultra-Dewatering Bag®

Contain sediment and oil pumped out during dewatering operations

- + Retains both oil and sediment, offering a combination of benefits not available in alternative dewatering bags.
- + Accommodates up to 4” discharge hose.
- + Helps comply with NPDES, 40 CFR 122.26 (1999) when used as Best Management Practice in Stormwater Pollution Prevention Plans.



Part#	Capacity cu. ft. (L)	Dimensions ft. (mm)	Weight lbs. (kg)
9729-0S	6 (170)	3 x 4 (915 x 1,220)	2.0 (1.0)
9724-0S	18 (510)	6 x 6 (1,829 x 1,829)	5.0 (2.5)
9723-0S	32 (906)	8 x 8 (2.4 x 2.4)	5.0 (2.3)
9725-0S	150 (4,247)	10 x 15 (3,048 x 4,572)	21.0 (9.5)
9727-0S	225 (6,371)	15 x 15 (4,572 x 4,572)	30.0 (14.0)
9739	Optional Hose Connector for 4” hoses		2.0 (1.0)

Ultra-Filter Sock® MADE IN USA

Stop harmful substances from entering the stormwater system EcoSmart

- + Use in front of storm drains, around downspouts, in gullies, and ditches.
- + Woven polymer casing allows water to pass through quickly while filtration media inside removes pollutants.
- + Available in 9-foot lengths. Units can be overlapped for longer coverage.
- + Available with different types of media depending on which pollutant is present.



Part#	Description	Dimensions in. (mm)	Removes	Weight lbs. (kg)
9453	Activated Carbon	108 x 7 x 4 (2,743 x 178 x 102)	Chemical & Odor	40.0 (18.0)
9455	Sorb 44	108 x 7 x 4 (2,743 x 178 x 102)	Hydrocarbons	15.0 (7.0)
9457	Sediment Removal	108 x 7 x 4 (2,743 x 178 x 102)	Sediment	40.0 (18.0)
9456	Phos Filter	108 x 7 x 4 (2,743 x 178 x 102)	Phosphorous	66.0 (30.0)
9454	Heavy Metal Removal	108 x 7 x 4 (2,743 x 178 x 102)	Heavy Metals	35.0 (16.0)

Ultra-Inlet Guard®




Protect drains and inlets without lifting any grates

- + Keeps dirt, sand, sediment, trash, and debris out of drains.
- + Quick and easy installation using built-in magnets — no more lifting heavy catch basin grates.
- + Heavy-duty material (non-woven, polypropylene geotextile) allows up to 92 gal/ft²/min. through drains.
- + Helps comply with NPDES, 40 CFR 122.26 (1999) and TMDL requirements.



9171



Built in magnets

Patents: See www.ultratechpatents.com

Part#	Dimensions in (mm)	Description	Weight lbs. (kg)
9170	24 x 24 (610 x 610)	Oil & Sediment	3.0 (1.5)
9171	24 x 36 (610 x 915)	Oil & Sediment	3.0 (1.5)
9172	24 x 48 (610 x 1,220)	Oil & Sediment	3.0 (1.5)
9174	24 x 36 (610 x 915)	Curb-Style, Oil & Sediment	4.0 (2.0)
9160	24 x 24 (610 x 610)	Oil & Sediment Plus	5.0 (2.5)
9161	24 x 36 (610 x 915)	Oil & Sediment Plus	5.0 (2.5)
9164	24 x 36 (610 x 915)	Curb-Style, Oil & Sediment Plus	5.0 (2.5)

Additional standard and custom sizes available

Ultra-Containment Sumps®



Rigid secondary containment for fuel tanks

- + Spill solution - Eliminate costly spills while storing fuels, oils and other hazardous liquids.
- + Rugged, all-polyethylene construction will not rust or corrode.
- + Pullover Cover option keeps rainwater out, yet allows easy access for pumping waste collection.
- + Meets Stormwater, SPCC, and EPA Container Storage Regulation 40 CFR 264.175.



Part#	Description	Top Outside Dims x H in. (mm)	Inside Bottom Dimensions in. (mm)	Containment Cap. gal. (L)	Weight lbs. (kg)
2800	275 Sump Without Drain	85 x 44 x 29 (2,159 x 1,118 x 737)	71 x 31 (1,803 x 788)	360 (1,363)	82.0 (37.0)
2801	275 Sump With 3/4" Drain	85 x 44 x 29 (2,159 x 1,118 x 737)	71 x 31 (1,803 x 788)	360 (1,363)	82.0 (37.0)
2823	550 Sump Without Drain	90 x 61 x 32.8 (2,286 x 1,549 x 832)	75 x 47.8 (1,905 x 1,213)	605 (2,291)	108.0 (49.0)
2820	550 Sump With 3/4" Drain	90 x 61 x 32.8 (2,286 x 1,549 x 832)	75 x 47.8 (1,905 x 1,213)	605 (2,291)	108.0 (49.0)
2830	1000 Sump Without Drain	149 x 64 x 33 (3,785 x 1,626 x 838)	138 x 52 (3,505 x 1,321)	1,100 (4,164)	244.0 (111.0)
2831	1000 Sump With 3/4" Drain	149 x 64 x 33 (3,785 x 1,626 x 838)	138 x 52 (3,505 x 1,321)	1,100 (4,164)	244.0 (111.0)
2832	1000 Sump With 2" Drain	149 x 64 x 33 (3,785 x 1,626 x 838)	138 x 52 (3,505 x 1,321)	1,100 (4,164)	244.0 (111.0)
2810	Optional Pullover Cover for 275 Sump				

Ultra-Drain Guard® Reusable Model



Capture dirt and sediment at construction sites and other "high erosion" areas

- + Rugged polypropylene construction can be easily rinsed and reused.
- + Deep accumulation pocket (36") can hold up to 500 lbs. of soil, sand, sediment, and dirt.
- + Designed for easy removal with backhoe, forklift, or other equipment.
- + Custom sizes available.
- + Helps comply with NPDES, 40 CFR 122.26 (1999) and TMDL requirements.



Part#	Dimensions in (mm)	Weight lbs. (kg)
9332	24 x 24 x 36 (610 x 610 x 914)	3 (1.4)
9330	36 x 24 x 36 (914 x 610 x 914)	3 (1.4)
9331	48 x 24 x 36 (1,219 x 610 x 914)	3 (1.4)

Ultra-Pipe Sock®



Control the flow of sediment and oil out of headwall and other types of pipes

- + Also use in pond applications where vertical pipes extend above the water surface, and preventing sediment in-flow during high-water events is required.
- + Several standard and custom sizes available.
- + Helps comply with NPDES, 40 CFR 122.26 (1999).



Part#	Dimensions in. (mm)	Oil Capacity gal. (L)	Weight lbs. (kg)
9705-OS	8 dia. x 60 L (204 x 1,524)	1.7 (6.4)	2.0 (1.0)
9706-OS	12 dia. x 60 L (305 x 1,524)	2.6 (9.8)	3.0 (1.5)
9707-OS	16 dia. x 60 L (407 x 1,524)	3.5 (13.2)	3.0 (1.5)

Ultra-Grate Guards®



Capture sediment, silt, and other debris before it enters our waterways

- + For use with flat grate catch basins.
- + Allows run-off to flow through while blocking sediment and/or capturing oil.
- + Standard and custom sizes available.
- + Helps comply with NPDES, 40 CFR 122.26 (1999) and TMDL requirements.



Patents: See www.ultratechpatents.com

Part#	Model	Dimensions in. (mm)	Oil Capacity gal. (L)	Weight lbs. (kg)
9272-SED	Sediment Only	18 x 24 x 4 (458 x 610 x 102)	-	2.5 (1.0)
9278-SED	Sediment Only	24 x 48 x 4 (610 x 1,220 x 102)	-	3.0 (1.5)
9272-OS	Oil & Sediment	18 x 24 x 4 (458 x 610 x 102)	0.5 (1.9)	3.0 (1.5)
9278-OS	Oil & Sediment	24 x 48 x 4 (610 x 1,220 x 102)	1.33 (5.0)	3.5 (1.5)

Other stock sizes and custom sizes available. Replacement Ultra-Filter-Tex pads available for Oil & Sediment Model Ultra-Grate Guards.

Ultra-Concrete Washout Berm® Economy Model

Capture concrete washout in portable and economical berm



- + Heavy-duty, rugged construction can be re-used multiple times (liner must be replaced before each use).
- + Special water & oil coating as well as water-resistant adhesive help provide extended life and reusability.
- + Heavy-duty, 6 mil liner (included) helps contain washout. Quickly and easily replaced.
- + Specially designed slotted edges “lock” liner in place and keeps it secure.
- + Chemically-resistant materials are compatible with concrete washout, paint waste and other construction materials.
- + Helps comply with EPA regulations.



Designed to fold flat for efficient and inexpensive shipping and storage.

Part#	Dimensions in. (mm)	Capacity gal. (L)	Weight lbs. (kg)
3515	30 x 30 x 15 (762 x 762 x 381)	50 (189)	5 (2.3)
3516	48 x 48 x 15 (1,219 x 1,219 x 381)	140 (530)	9 (4)
3517	60 x 60 x 12 (1,524 x 1,524 x 305)	180 (681)	11 (5)

Ultra-Hard Top Plus Model®



Store hazardous drums safely outdoors with pumps and funnels in place

- + Tall head space easily accommodates rotary drum pumps and large conical funnels.
- + Low profile containment pallet positions drum-top funnels at a safe, convenient level to pour hazardous wastes.
- + 100% polyethylene construction will not rust or corrode.
- + Meets SPCC and EPA Container Storage Regulation 40 CFR 264.175 Spill Containment Regulations.
- + Helps meet Stormwater Management Regulations — NPDES, 40 CFR 122.26 (1999).



9612



Part#	Description	Dimensions in. (mm)	Uniformly Dist. Load lbs. (kg)	Contain. Cap. gal. (L)	Weight lbs (kg)
9640	P1 Plus (1-Drum)	36 x 36 x 66 (915 x 915 x 1,677)	800 (363)	70 (265)	75.0 (34.0)
9612	P2 Plus (2-Drum)	67.3 x 41.3 x 74 (1,708 x 1,047 x 1,677)	4,500 (2,041)	66 (250)	260.0 (118.0)
9636	P4 Plus (4-Drum)	64.5 x 62 x 79 (1,638 x 1,575 x 2,007)	9,000 (4,082)	75 (284)	440.0 (200.0)
0676	Ramp - Polyethylene & Steel	55.5 x 28.5 x 8.8 (1,410 x 724 x 222)	700 (318)	—	43.0 (19.5)

Also available with drain

Ultra-Drain Seal®



Stop spills from going down the drain

- + Reinforcing mesh is “sandwiched” between layers of polyurethane — increases durability and resistance to tearing.
- + Unique, urethane construction allows the pad to deform and seal off most drains — temporarily “seals” to any smooth surface.
- + A valuable addition to any emergency response plan, spill kit, SPCC, or stormwater management program.
- + Unlike some alternative products, BOTH sides will quickly seal drains — there is no specified “top” or “bottom.”



Patents: See www.ultratechpatents.com

Part#	Shape	Dimensions in. (mm)	Weight lbs. (kg)
2126	Square	18 x 18 x .4 (457.2 x 457.2 x 9.7)	5.0 (2.5)
2127	Square	24 x 24 x .4 (609.6 x 609.6 x 9.7)	8.0 (3.5)
2130	Square	36 x 36 x .4 (914.4 x 914.4 x 9.7)	20.0 (9.0)
2131	Square	42 x 42 x .4 (1,066.8 x 1,066.8 x 9.7)	23.0 (10.5)
2132	Square	48 x 48 x .4 (1,219.2 x 1,219.2 x 9.7)	36.0 (17.0)
2133	Square	54 x 54 x .4 (1,371.6 x 1,371.6 x 9.7)	41.0 (18.5)
2134	Circular	12 dia. x .4 (304.8 x 304.8 x 9.7)	3.0 (1.5)
2135	Circular	20 dia. x .4 (508 x 508 x 9.7)	6.0 (3.0)
2136	Circular	30 dia. x .4 (762 x 762 x 9.7)	11.0 (5.0)
2137	Circular	42 x 42 x .4 (1,066.8 x 1,066.8 x 9.7)	19.0 (9.0)
2124	Rectangular	58 x 18 x .4 (1,473.2 x 457.2 x 9.7)	16.0 (7.0)
2125	Rectangular	58 x 36 x .4 (1,473.2 x 914.4 x 9.7)	26.0 (12.0)

Note: Not intended for long-term outdoor use (more than two [2] hours), as UV exposure and/or heat for extended periods can degrade the product. For applications where extended use may be required, the Ultra-Drain Seal Plus should be considered.

Ultra-Spill Berm®



Temporary berm seals off spills from the environment, nearby drains, and doorways

- + Standard 10-foot sections can be cut to various lengths.
- + Unique, urethane material “weeps” into small cracks and crevices to seal off liquid flow.
- + The Ultra-Spill Berm is non-absorbing and is easily cleaned for repeated use.
- + Applications include:
 - Spill response
 - Temporary secondary containment
 - Sealing off of doorways during wash down operations
- + Flexible Ultra-Spill Berm will bend and turn to form almost any shape while temporarily “bonding” to any smooth surface.
- + Helps comply with NPDES and SPCC.



Part#	Color	Dimensions in (mm)	Weight lbs. (kg)
2100	Orange	120 x 4 x 2.3 (3,048 x 101.6 x 57.2)	31.0 (14.0)

2101 Connectors used to connect 10' sections • 2102 90° Corners used with Connectors • 2104 Carrying case



Georgia Underground Superstore · 5158-G Kennedy Road, Forest Park, Georgia 30297 USA
(404) 675-7999 · www.georgiaunderground.net